



A JohnsonDiversey Company

180UC

High Temperature Undercounter Dishwasher

Item. # _____

Spec. # _____




FEATURES:

- 24 racks / 96 covers per hour.
- Automatic soil purging system. Filters wash water and traps plate debris in an external drawer. Drawer can be easily removed for dumping contents.
- Upper and lower rotating wash and rinse arms provide excellent cleaning and rinsing.
- All 304 stainless steel construction, no plastic parts to repair.
- Built-in booster heater. Economical, single source heat lowers energy costs.
- Large 15" height clearance accommodates larger dishes and half size sheet pans.
- Low water consumption. Uses only .86 gallons of water per cycle.
- Includes water pressure regulator valve.
- Pumped drain.

Patent Pending



Top mounted controls are easy to read and simple to operate.



Large 15" door clearance accommodates oversized plates and utensils.



Upper and lower rotating wash and rinse arms blast water in all directions for optimum cleaning and rinsing.



Soil purging system keeps the wash water clean assuring excellent results while reducing chemical costs.

AIA # _____

CMA Dishmachines 12700 Knott Avenue, Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

Lit#00-Date printed

CMA reserves the right to modify specifications or discontinue models without prior notification.


Printed in the U.S.A.

© 2003 CMA, Inc.



A JohnsonDiversey Company

180UC
High Temperature
Undercounter Dishwasher

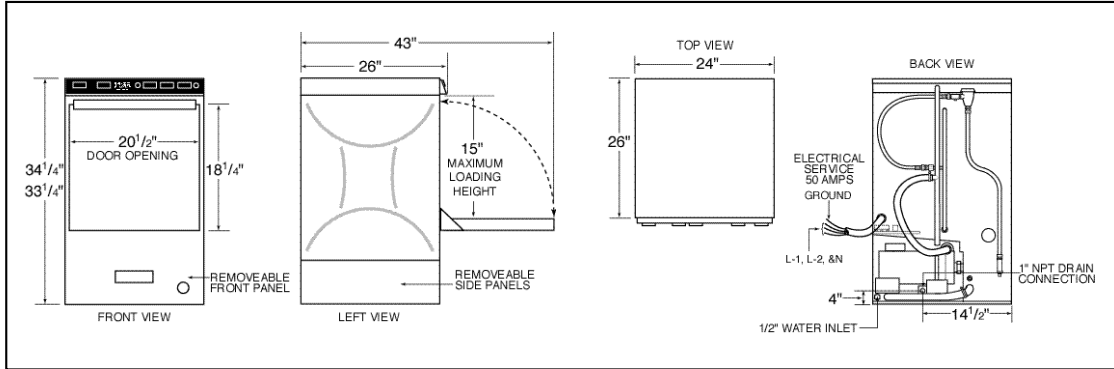

Spec #

Specifications:

CMA-180UC		USA	(Metric)	CMA-180UC		USA	(Metric)
WATER CONSUMPTION				FRAME DIMENSIONS			
PER RACK	86 GAL.		(3.25 L)	DEPTH	26"		(66.04 CM)
PER HOUR	20.6 GAL.		(77.8 L)	WIDTH	24"		(60.96 CM)
OPERATING CYCLE				WASH PUMP MOTOR			
WASH TIME-SEC	94		94		3/4 HP		3/4 HP
RINSE TIME-SEC	16		16	ELECTRICAL RATING*			
DWELL TIME-SEC	10		10		208 VOLTS		230 VOLTS
TOTAL CYCLE TIME	2 MIN.		2 MIN.		1 PH-60 Hz		1 PH-60 Hz
OPERATING CAPACITY				USE #8 AWG (MIN) 90°C STANDARD COPPER WIRE			
RACKS PER HOUR	24		24	THIS SYSTEM REQUIRES THREE POWER WIRES WHICH INCLUDES A CURRENT CARRYING NEUTRAL. AN ADDITIONAL FOURTH WIRE MUST BE PROVIDED FOR MACHINE GROUND.			
WASH TANK CAPACITY	2.5 GAL.		(9.46 L)	SHIPPING WEIGHT			
PUMP CAPACITY	38 GPM		(144 LPM)	APPROXIMATE	234#		(106 KG)
WATER REQUIREMENTS				SHIPPING WEIGHT			
WATER INLET	1/2"		(1.27 CM)				
DRAIN CONNECTION	1"		(2.54 CM)				
RINSE PRESSURE SET	20 PSI		1.41 KG/CM ²				
CYCLE TEMPERATURES							
WASH-°F	150° F-160° F		(65.5°C/71°C)				
RINSE-°F	180° F-195° F		(82°C/90°C)				

Summary Specifications:CMA-180UC

The CMA Energy Mizer model CMA-180UC undercounter dishwasher provides hot water (180°F) sanitizing through the use of a built-in booster heater. The unit comes standard with upper and lower stainless steel wash and final rinse arms, digital LED temperature gauges and easy to operate controls. The CMA-180UC incorporates an automatic soil purging system uniquely designed (patent pending) into the wash tank that enables the wash water to remain clean, assuring excellent results and less chemical use. The CMA-180UC is constructed entirely of 304 stainless steel. Uses standard 20"X20" dishracks and accommodates oversized plates and utensils with a 15" door clearance.

Options Available:CMA-180UC

- 48" undercounter dishtable
- Rinse pump
- Detergent and rinse pump
- Stainless Steel Pedestal

AIA #

