



A JohnsonDiversey Company



**GL-X**  
Chemical Sanitizing  
Undercounter  
Glasswasher

Item. # \_\_\_\_\_

Spec. # \_\_\_\_\_



**FEATURES:**

- 24 racks per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Instant start makes unit simple to operate.
- Built-in Hot Water Assurance System guarantees hot water every cycle.
- Pumped drain allows for flexible installations. No floor drain is required.



Upper and lower rotating wash arms guarantee excellent results.



Uses standard 20"X20" racks. Large 11-1/4" glass clearance.



"Built in" hot water assurance system provides hot water every cycle.




"Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.

AIA # \_\_\_\_\_



A Johnson Diversey Company

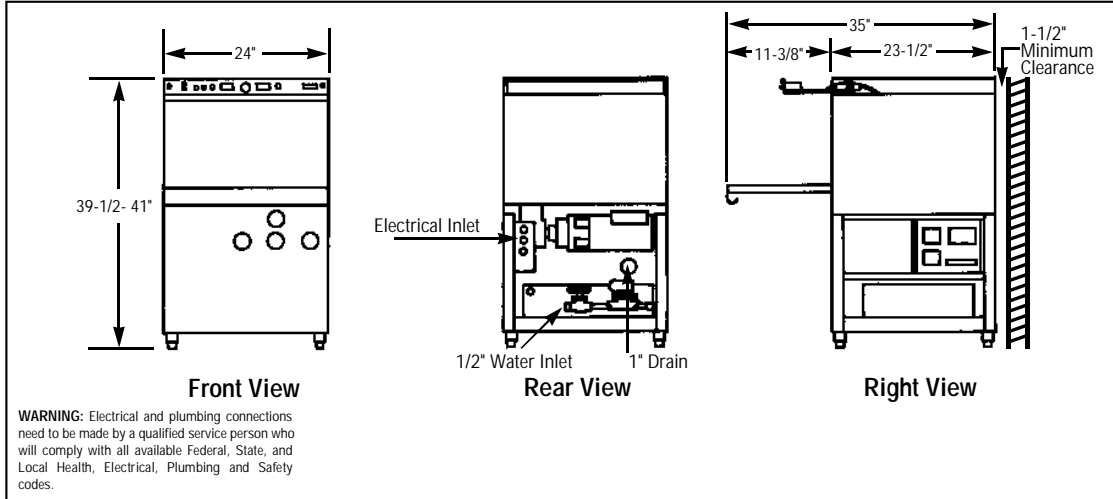

Spec. #

**Specifications:**

MODEL GL-X	USA	METRIC	USA	METRIC
<b>OPERATING CAPACITY</b>				
RACKS PER HOUR	24	-		
<b>OPERATING CYCLE</b>				
WASH TIME-SEC	57	57		
RINSE TIME-SEC	48	48		
DWELL/TIME-SEC	15	15		
TOTAL CYCLE TIME	120	120		
<b>WASH TANK CAPACITY</b>	1.7 GAL.	(6.45 L)		
<b>WASH PUMP CAPACITY</b>	35 GPM	(132 LPM)		
<b>MINIMUM TEMPERATURE REQUIRED</b>				
WASH TEMP.	120°F	(50°C)		
<b>WATER CONSUMPTION</b>				
PER RACK	1.7 GAL.	(6.45 L)		
PER HOUR	51 GPH	(154 LPH)		
WATER INLET	1/2"	-		
DRAIN	1"	-		
<b>WASH PUMP MOTOR HP</b>	1	1		
<b>DIMENSIONS</b>				
DEPTH	23-1/2"	(60cm)		
WIDTH	24"	(61cm)		
HEIGHT	39-1/2"-41"	(100cm)		
MAXIMUM CLEARANCE				
HEIGHT FOR GLASSWARE	11-1/4"	(27.94cm)		
<b>STANDARD DISHRACK</b>	1	1		
DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)		
<b>ELECTRICAL RATING</b>				
VOLTS	115			
AMPS		27		
<b>SHIPPING WEIGHT APPROXIMATE</b>	244#	(110.6kg)		

**Summary Specifications: Model GL-X**

The GL-X glasswasher is designed to produce sparkling clean glassware utilizing our unique hot water assurance system. The GL-X is easy to use, fast and efficient, while conserving water, energy and chemicals. Built-in booster heater provides continuous 130°F hot water every cycle. The GL-X is constructed for extended life out of heavy gauge welded stainless steel and is equipped with an integrated chemical delivery system. The GL-X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

**Available Options**

- Stainless Steel Pedestal
- Alternate electrical available for export

AIA #