



A JohnsonDiversey Company



L-1X16
 Chemical Sanitizing
 Undercounter
 Dishwasher

Item. # _____



FEATURES:

- 24 racks / 96 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- 16" high door opening allows the washing of larger items.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.

Spec. # _____



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.



Optional pedestal allows the L-1X16 to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".


AIA # _____



L-1X16
Chemical Sanitizing Undercounter Dishwasher

A JohnsonDiversey Company

WARNING: Electrical and plumbing connections need to be made by a qualified service person who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.

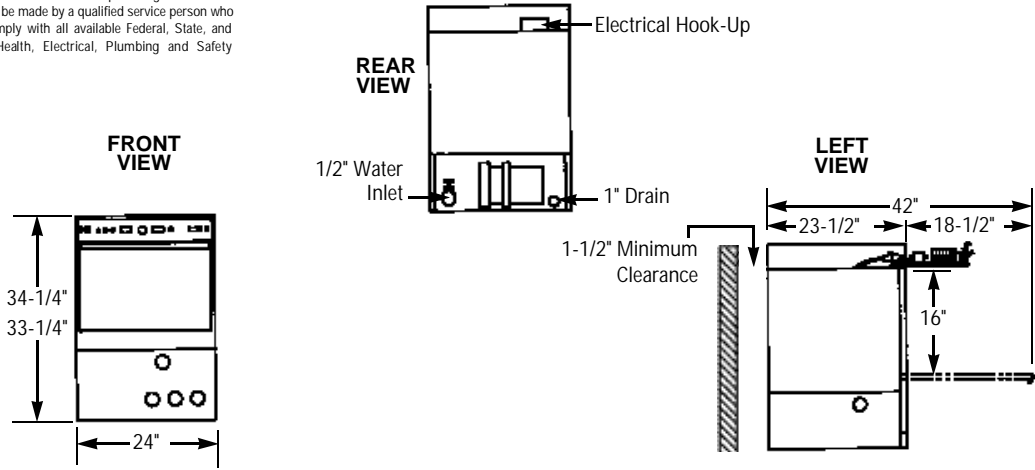

Spec. #

Specifications:

MODEL L-1X16	USA	METRIC	USA	METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)	24	24	WASH PUMP MOTORS HP	1
OPERATING CYCLE WASH TIME-SEC	57	57	DIMENSIONS DEPTH	23-1/2" (59cm)
RINSE TIME-SEC	48	48	WIDTH	24" (61cm)
DWELL/PURGE-SEC	15	15	HEIGHT	33-1/4"-34-1/4" (84-86 cm)
TOTAL CYCLE TIME	120	120	MAXIMUM CLEARANCE	
WASH TANK CAPACITY	1.7 GAL. (6.43 L)		HEIGHT FOR DISHES	16" (40.64cm)
WASH PUMP CAPACITY	35 GPM (132 LPM)		STANDARD DISHRACK DIMENSIONS	19-3/4"X19-3/4" (50X50cm)
OPERATING TEMPERATURE REQUIRED	120°F (49°C)		ELECTRICAL RATING	VOLTS
RECOMMENDED	140°F (60°C)			AMPS
WATER CONSUMPTION PER RACK	1.7 GAL. (6.43 L)			115
PER HOUR	40.8 GPH (154 LPH)			16
WATER INLET	1/2"		SHIPPING WEIGHT	
DRAIN	1"		APPROXIMATE	196# (88kg)

Summary Specifications: Model L-1X16

CMA Energy Mizer model L-1X16, low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X16 is constructed entirely of 304 stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X16 incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 6" (set of 4)
- Stainless Steel Pedestal
- 48" Undercounter Dishtable
- Electrical Variations Available

AIA #

CMA Dishmachines 12700 Knott Avenue Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

Lit#0109

CMA reserves the right to modify specifications or discontinue models without prior notification.

Printed in the U.S.A.

© 2003 CMA, Inc.